


Gear pumps Group 2

Group 2 Gear pumps with cast Iron end plates

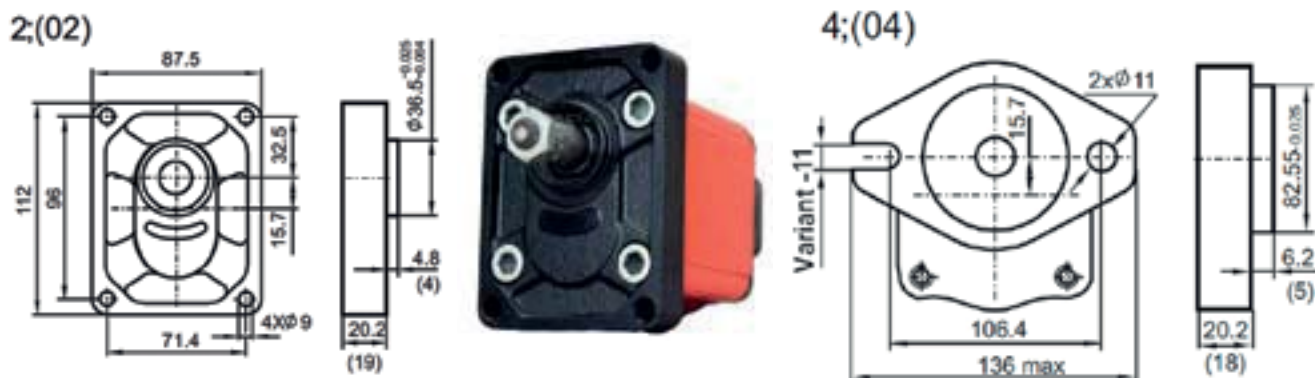

Group 2 Displacement cc/rev	Flow l/min @1500 rpm	Minimum speed rpm	Maximum speed rpm	Max continuous Pressure bar @ 1500 rpm	Max Pressure bar @ 1500 rpm	Suction Port bsp	Pressure Port bsp
4	6	700	3300	200	240	1/2"	1/2"
5	7.5	700	3300	200	240	1/2"	1/2"
6	9	700	3300	200	240	1/2"	1/2"
9	13.5	700	3300	200	240	1/2"	1/2"
10	15	700	3300	200	240	3/4"	1/2"
11	16.5	700	3300	200	240	3/4"	1/2"
12	18	700	3300	200	240	3/4"	1/2"
14	21	700	3300	190	230	3/4"	1/2"
15	22.5	700	2800	190	230	3/4"	1/2"
16	24	700	2800	190	230	3/4"	1/2"
17	25.5	700	2800	190	230	3/4"	1/2"
19	28.5	700	2300	180	220	3/4"	1/2"
22	33	700	2300	180	220	3/4"	1/2"
25	37.5	700	2300	150	210	3/4"	1/2"
26	39	700	2300	150	210	3/4"	1/2"
28	42	700	2300	140	200	3/4"	3/4"

Example Ordering Code

Tandem and triple pumps are available please contact us with your requirement....

Rotation	Displacement	X	Mounting Flange	Ports	Shaft type	B
C.. Clockwise A.. Anti Clockwise	11 cc/rev	X	2.. 4 Bolt Standard European 3.. 4 Bolt flange 80mm Spigot 4.. SAE 'A' 2 Bolt flange	A.. Diamond flange ports C.. Square flange ports T.. Threaded bsp ports	1.. 1:8 Tapered Shaft 2.. 1:5 Tapered Shaft 4.. 15.88 mm Parallel 5.. SAE 9 Tooth Spline 9.. DIN 5482 Spline	B
Example						
C	11	X	2	T	1	B