

2 Way Solenoid Operated Poppet Valves

Steel Bodied up to 320 bar 1/4" up to 1 1/4" bsp

2 WAY POPPET HIGH PRESSURE STEEL BODIED


Type VAS

N.B. VAS Valves are checked in only one direction when in the closed position, allowing free flow in the other direction. Available in 12 or 24 DC & 24, 110 or 230 AC

Normally Closed	bsp	Max Flow l/min	Max Pressure bar
VAS-NC-14	1/4"	40	320
VAS-NC-38	3/8"	50	320
VAS-NC-12	1/2"	70	320
VAS-NC-34	3/4"	70	320
VAS-NC-100	1"	150	320
VAS-NC-114	1 1/4"	260	350



Normally Open	bsp	Max Flow l/min	Max Pressure bar
VAS-NA-14	1/4"	40	320
VAS-NA-38	3/8"	50	320
VAS-NA-12	1/2"	70	320
VAS-NA-34	3/4"	70	320
VAS-NA-100	1"	150	320
VAS-NA-114	1 1/4"	260	350

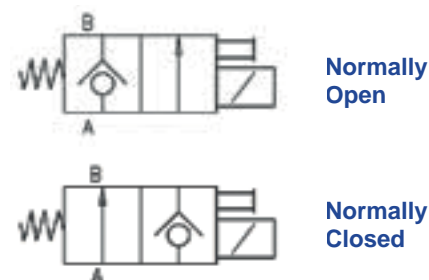

N.B. On the VAS 1 1/4" Ported Valve the closed path is B to A port, Not A to B port !

2 WAY POPPET CHECKED IN BOTH DIRECTIONS

Type KV-2/2

N.B. KV Valves are checked in both directions when in the closed position. Available in 12, 24, 48 DC & 110 or 230 AC

PART NUMBER	bsp	Max Flow l/min	Max Pressure bar
KV-2/2-6-S-A-3/8 NORMALLY OPEN	3/8"	30	210
KV-2/2-6-S-B-3/8 NORMALLY CLOSED	3/8"	30	210

