


# BF400 da 1 a 6 leve

# BF400 from 1 to 6 levers

## Caratteristiche generali / Technical characteristics




	l/min	GPM
• Portata nominale / Nominal flow	35	9
• Portata limite / Max flow	45	12
	bar	PSI
• Pressione nominale / Nominal pressure	250	3600
• Pressione max sugli utilizzi / Max pressure on ports	320	4700
• Contropressione max allo scarico / Max pressure in tank-line	80	1100

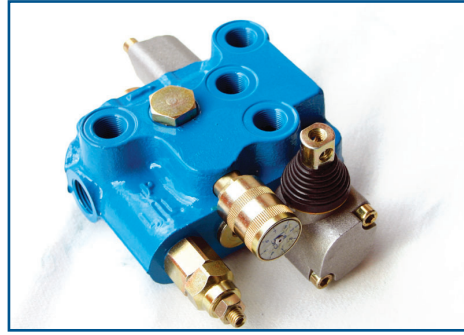

P-T - TEMPERATURA OLIO 50°C - VISCOSITÀ 3,5°E

P-A/B - TEMPERATURA OLIO 50°C - VISCOSITÀ 3,5°E


A/B-T - TEMPERATURA OLIO 50°C - VISCOSITÀ 3,5°E

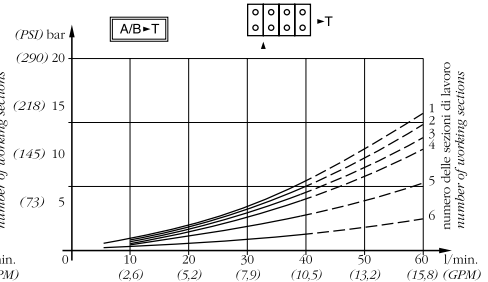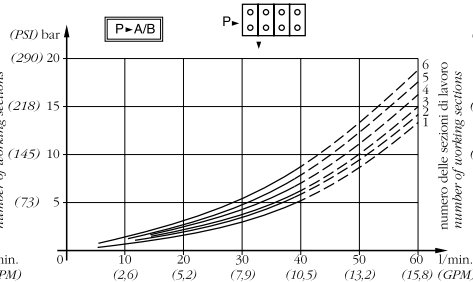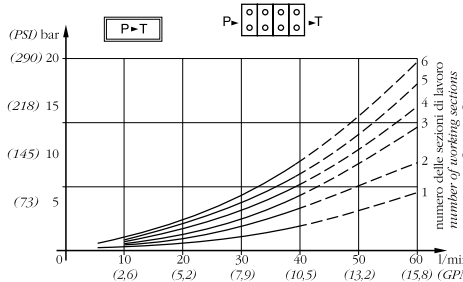

Gli elementi prioritari hanno 5÷8 bar in più a seconda della portata regolata

Priority elements get 5÷8 bar (72÷116 PSD) more according to related flow.

BF401/...=	n° 1 elemento prioritario
	n° 1 priority element
BF402/...=	n° 2 elementi prioritari
	n° 2 priority elements
BF403/...=	n° 3 elementi prioritari
	n° 3 priority elements
BF404/...=	n° 4 elementi prioritari
	n° 4 priority elements
BF405/...=	n° 5 elementi prioritari
	n° 5 priority elements
BF406/...=	n° 6 elementi prioritari
	n° 6 priority elements

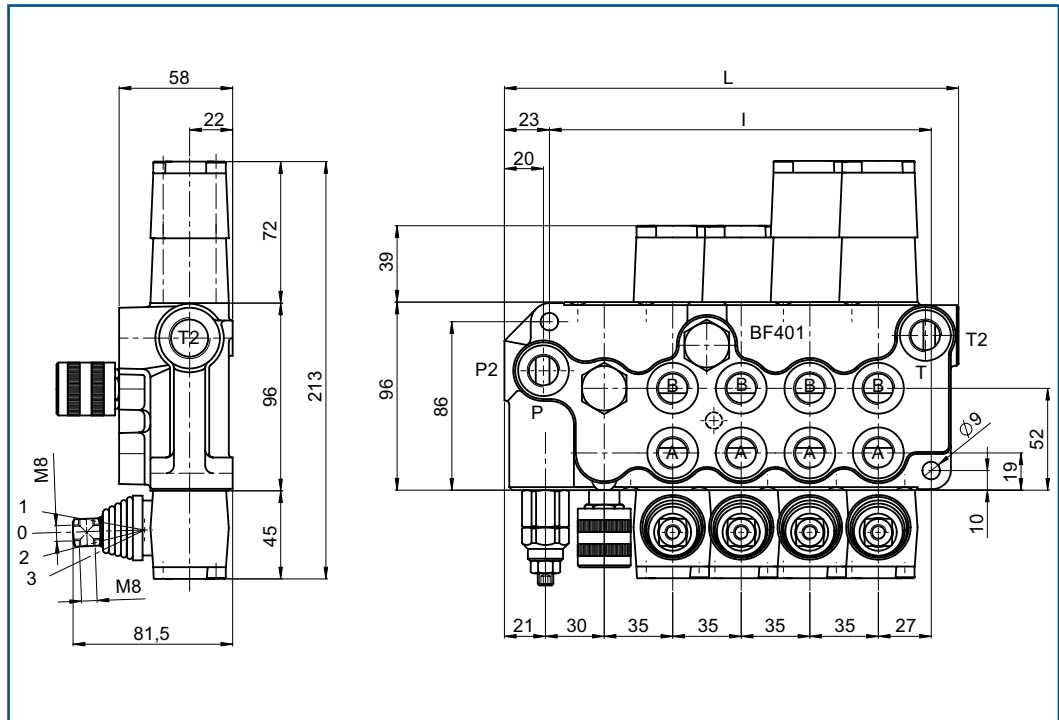

MOD	L	I	Kg
BF40.../1	125	90	3.9
BF40.../2	160	125	5.2
BF40.../3	195	160	6.4
BF40.../4	230	195	7.6
BF40.../5	265	230	8.8
BF40.../6	300	265	10

## FILETTATURA STANDARD - STANDARD THREADS

COD	A-B	P	T	P <sub>2</sub>	T <sub>2</sub>
G	3/8"	3/8"	3/8"	1/2"	1/2"
F	3/4" - 16	3/4" - 16	3/4" - 16	7/8" - 14	7/8" - 14

◀ Su richiesta filettature diverse  
Other threads available on request

