


# BF200 da 1 a 5 leve

# BF200 from 1 to 5 levers

## Caratteristiche generali / Technical characteristics




	l/min	GPM
• Portata nominale / Nominal flow	17	4,5
• Portata limite / Max flow	25	6,6
	bar	PSI
• Pressione nominale / Nominal pressure	250	3600
• Pressione max sugli utilizzi / Max pressure on ports	320	4700
• Contropressione max allo scarico / Max pressure in tank-line	80	1100

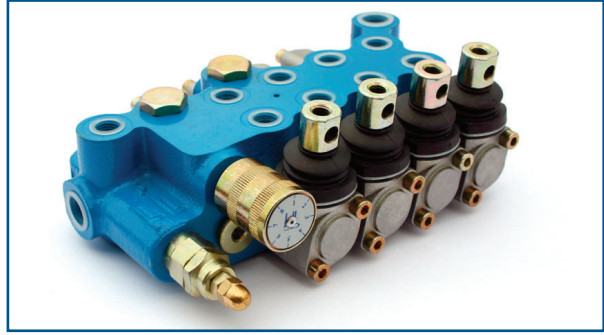

P→T - TEMPERATURA OLIO 50°C - VISCOSITÀ 3,5°E

P→A/B - TEMPERATURA OLIO 50°C - VISCOSITÀ 3,5°E

A/B→T - TEMPERATURA OLIO 50°C - VISCOSITÀ 3,5°E

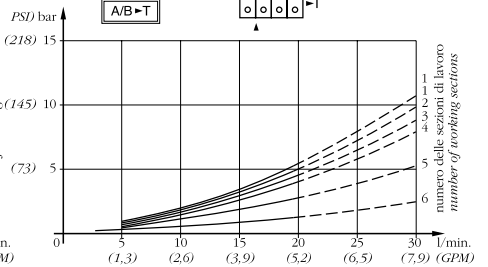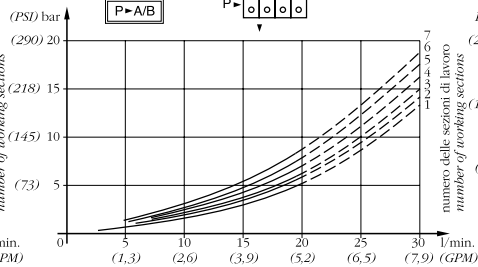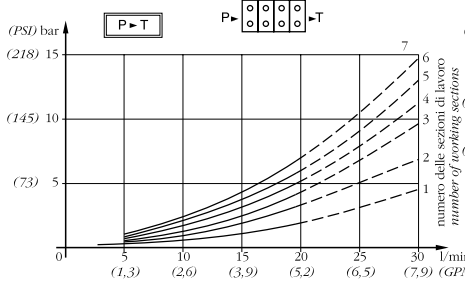


Gli elementi prioritari hanno 5÷8 bar in più a seconda della portata regolata

Priority elements get 5÷8 bar (72÷116 PSI) more according to related flow.

BF201/...=	n° 1 elemento prioritario	n° 1 priority element
BF202/...=	n° 2 elementi prioritari	n° 2 priority elements
BF203/...=	n° 3 elementi prioritari	n° 3 priority elements
BF204/...=	n° 4 elementi prioritari	n° 4 priority elements
BF205/...=	n° 5 elementi prioritari	n° 5 priority elements

MOD	L	I	Kg
BF20.../1	76	50	2,4
BF20.../2	106	80	3,2
BF20.../3	136	110	4,0
BF20.../4	166	140	4,8
BF20.../5	196	170	5,6

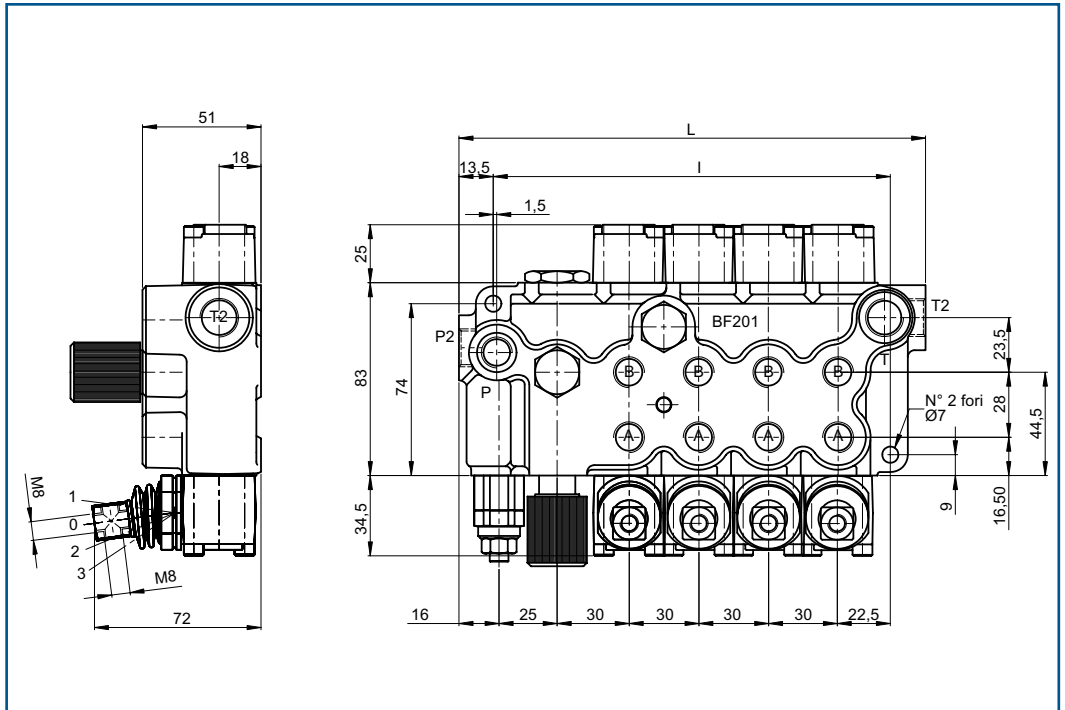

FILETTATURA STANDARD - STANDARD THREADS							
COD	A-B	P	T	P <sub>2</sub>	T <sub>2</sub>	P <sub>3</sub>	T <sub>3</sub>
G	1/4"	1/4"	3/8"	3/8"	3/8"	1/4"	1/4"
F	9/16" - 18	9/16" - 18	3/4" - 16	3/4" - 16	3/4" - 16		

◀ Su richiesta filettature diverse  
Other threads available on request

